




To accompany plans dated \_

## NOTES:

- Where the distance between back of post and hinge point is less than 24', vegetation control to be constructed flush with the back edge of the post.
- Where dike is constructed under railing, construct vegetation control to back edge of dike. Where paved shoulder is constructed within 24" in front of the post, construct vegetation control to the edge of paved shoulder.
- 3. Direction of adjacent traffic indicated by -----

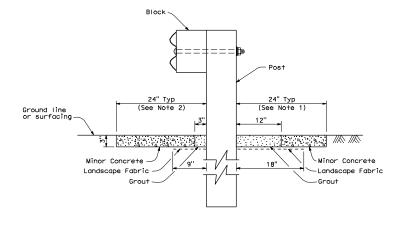

SECTION A-A

STATE OF CALIFORNIA
DEPARTMENT OF TRANSPORTATION

## METAL BEAM GUARD RAILING TYPICAL VEGETATION CONTROL STANDARD RAILING SECTION

NO SCALE

NSP A77C5 DATED OCTOBER 20, 2006 SUPPLEMENTS THE STANDARD PLANS BOOK DATED MAY 2006.

NEW STANDARD PLAN NSP A77C5

7-17-0